

The μ logger – 4R

Key Features

Serial (RS232) connectivity.

Four separate channels usually for connecting to our high quality thermistor sensors (-40°C - +85°C).

Connect to Type 1 sensors.

12-bit (0.025%) resolution.

0.25% basic accuracy.

Accepts any sensor that produces an output in the range 0 – 50k Ω . We can generate look-up tables for new sensors.

Can operate for over two years on an AA battery.


Up to 32000 samples can be stored in non-volatile memory.

Small size: 65mm. x 65mm. x 28mm.

Available from:


Zeta-tec Limited
11 Larches Road
DURHAM
DH1 4NL

Phone: + 44 (0)191-383-9974
Fax: + 44 (0)191-303-8075
e-mail: sales@zeta-tec.co.uk
www.zeta-tec.co.uk

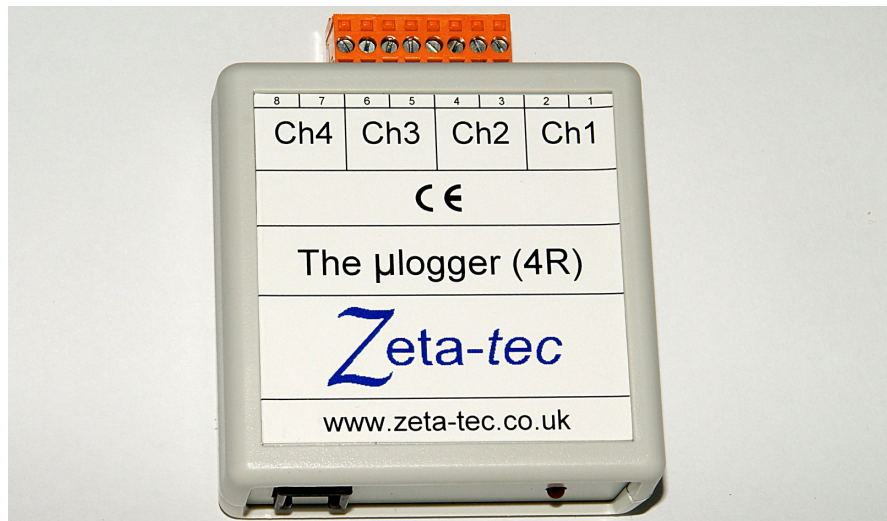

The μ logger (pronounced micro-logger) is a small, high quality and versatile battery powered remote data logger. This model has four resistance channels; usually for connecting to our high quality thermistor based temperature sensors but can be connected to any sensor that produces a 0 – 50k Ω output. We supply a standard set of look-up tables and we will normally generate (for free) any other look-up tables that customers require.

High quality precision components are used throughout. The supplied software allows the μ logger to be configured before leaving it at the logging site. At the end of the logging period your data is offloaded and can be displayed and analysed using the same software.

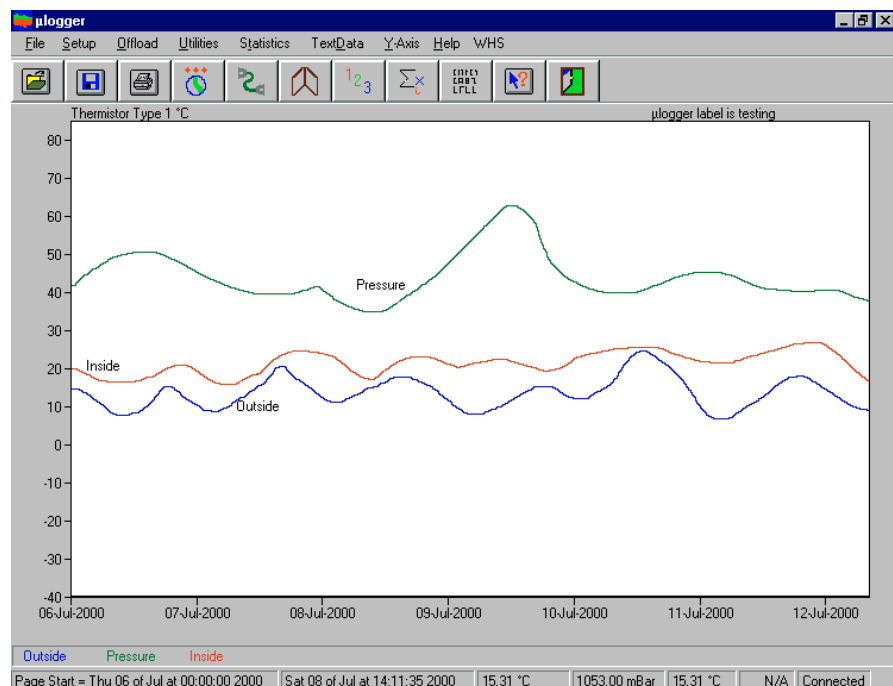

TECHNICAL SPECIFICATIONS

Hardware

- ❑ Up to 12 bit (0.025%) resolution with a basic 0.25% accuracy, 8-bit and 10-bit resolution can also be set to maximise memory usage.
- ❑ Four basic resistance channels; one, two, three, or all four channels can log simultaneously.
- ❑ Up to 32000 measurements (depending on resolution required) can be recorded.
- ❑ Logging interval 1sec. - 12 hours.
- ❑ 1 AA user replaceable battery (lasts over two years with standard use – supplied with a μ logger).
- ❑ High specification industrial grade components used throughout for maximum reliability.

Software (a trial version can be downloaded from our Web-site)

- ❑ Runs under W95 (or greater) or NT 4.0 (or greater).
- ❑ Graphical or textual display for your data.
- ❑ Zoom in on your data.
- ❑ Scroll through your data.
- ❑ Name your probes.
- ❑ Min., Max. and average calculation.
- ❑ Save and load data and files.
- ❑ Save and load configuration files.
- ❑ Set 'look-up' tables to use for each channel.
- ❑ Set start & stop time (stop when full, after a set time or allow memory rollover).
- ❑ Log while connected to PC.
- ❑ Interrupt driven serial comms. (COM 1 – 4).
- ❑ Print data graphs.
- ❑ Export data to your spreadsheet.

Available from Zeta-tec: Model No. ZT-1002.

Sensors available:

- ❑ 1m. lead mounted in a stainless steel tube (ZT-3101)
- ❑ 2m. lead mounted in a stainless steel tube (ZT-3102)
- ❑ 5m. lead mounted in a stainless steel tube (ZT-3105)
- ❑ 10m. lead mounted in a stainless steel tube (ZT-3110)
- ❑ Specials to order

E & O.E.